
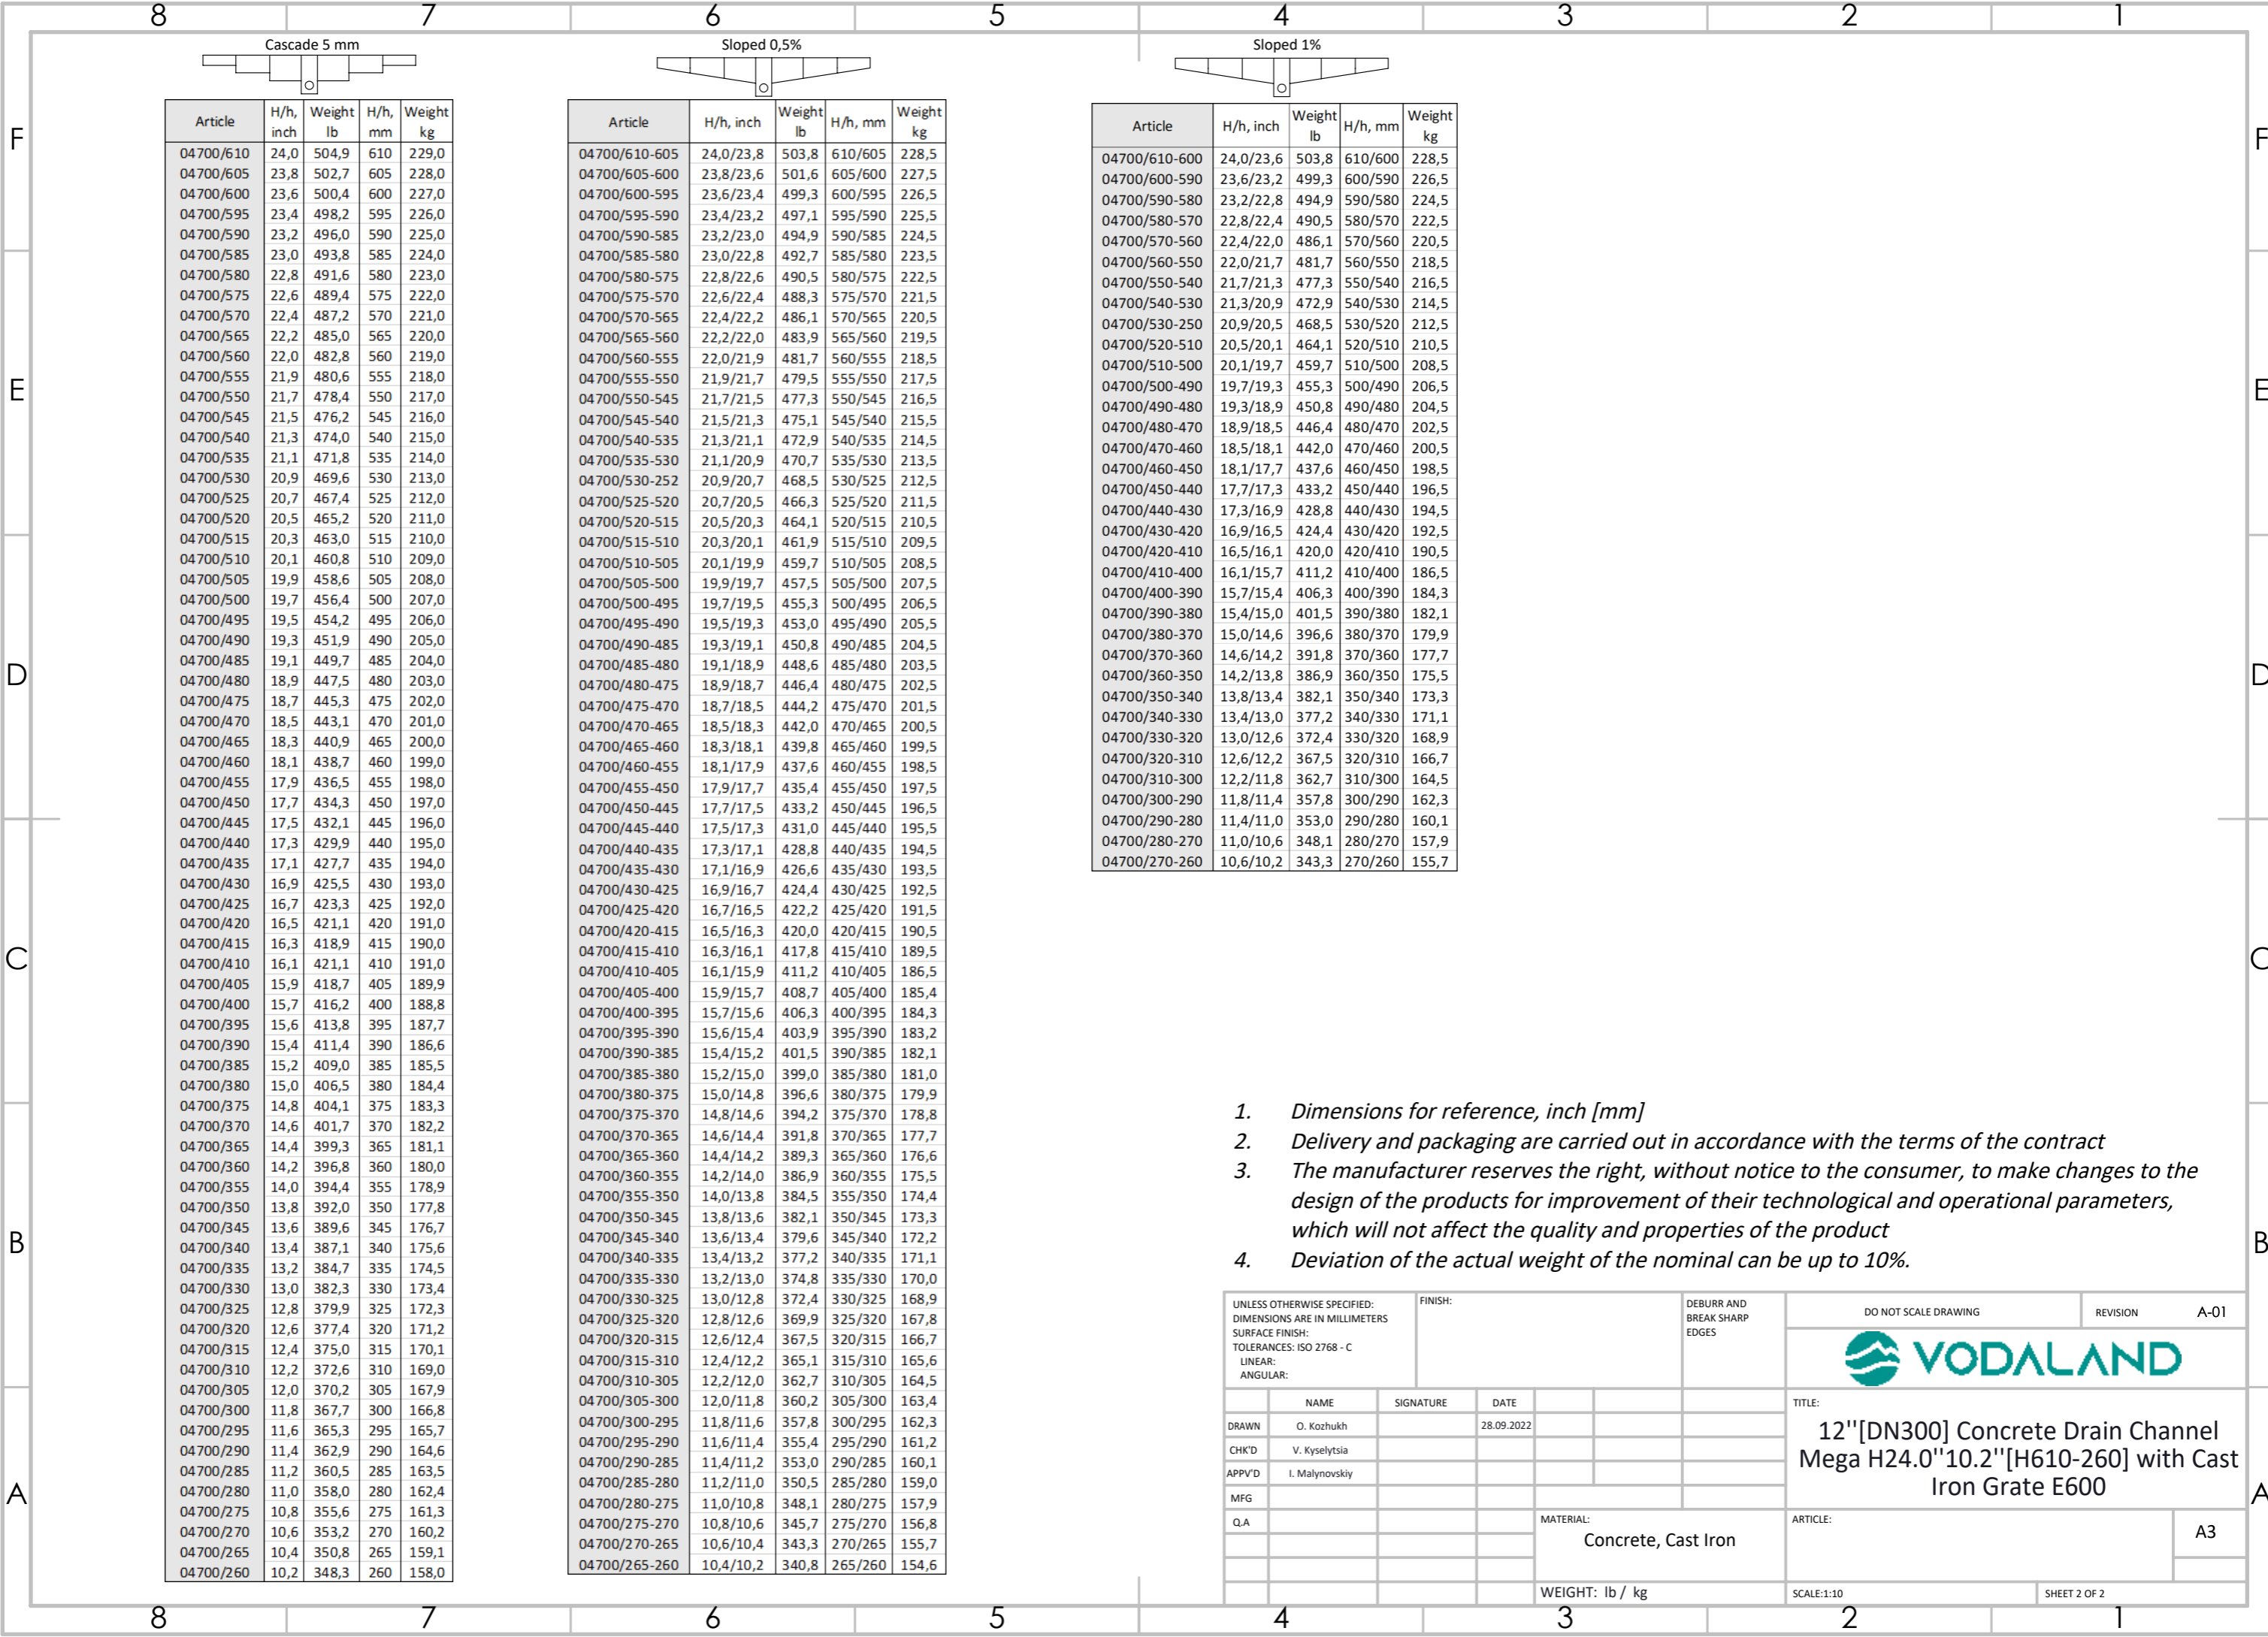


1. Dimensions for reference, inch [mm]
2. Delivery and packaging are carried out in accordance with the terms of the contract
3. The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product
4. Deviation of the actual weight of the nominal can be up to 10%.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION		A-01	
													
	NAME		SIGNATURE		DATE				TITLE: 12"[DN300] Concrete Drain Channel Mega H24.0"10.2"[H610-260] with Cast Iron Grate E600		ARTICLE: A3		
DRAWN	O. Kozhukh				28.09.2022								
CHK'D	V. Kyselytsia												
APPV'D	I. Malynovskiy												
MFG													
Q.A													
						MATERIAL: Concrete, Cast Iron							
						WEIGHT: lb / kg		SCALE:1:10		SHEET 1 OF 2			

	NAME	SIGNATURE	DATE		
DRAWN	O. Kozhukh		28.09.2022		
CHK'D	V. Kyselytsia				
APPV'D	I. Malynovskiy				
MFG					
Q.A					
			MATERIAL: Concrete, Cast Iron		
			WEIGHT: lb / kg		



Article	H/h, inch	Weight lb	H/h, mm	Weight kg
04700/610	24,0	504,9	610	229,0
04700/605	23,8	502,7	605	228,0
04700/600	23,6	500,4	600	227,0
04700/595	23,4	498,2	595	226,0
04700/590	23,2	496,0	590	225,0
04700/585	23,0	493,8	585	224,0
04700/580	22,8	491,6	580	223,0
04700/575	22,6	489,4	575	222,0
04700/570	22,4	487,2	570	221,0
04700/565	22,2	485,0	565	220,0
04700/560	22,0	482,8	560	219,0
04700/555	21,9	480,6	555	218,0
04700/550	21,7	478,4	550	217,0
04700/545	21,5	476,2	545	216,0
04700/540	21,3	474,0	540	215,0
04700/535	21,1	471,8	535	214,0
04700/530	20,9	469,6	530	213,0
04700/525	20,7	467,4	525	212,0
04700/520	20,5	465,2	520	211,0
04700/515	20,3	463,0	515	210,0
04700/510	20,1	460,8	510	209,0
04700/505	19,9	458,6	505	208,0
04700/500	19,7	456,4	500	207,0
04700/495	19,5	454,2	495	206,0
04700/490	19,3	451,9	490	205,0
04700/485	19,1	449,7	485	204,0
04700/480	18,9	447,5	480	203,0
04700/475	18,7	445,3	475	202,0
04700/470	18,5	443,1	470	201,0
04700/465	18,3	440,9	465	200,0
04700/460	18,1	438,7	460	199,0
04700/455	17,9	436,5	455	198,0
04700/450	17,7	434,3	450	197,0
04700/445	17,5	432,1	445	196,0
04700/440	17,3	429,9	440	195,0
04700/435	17,1	427,7	435	194,0
04700/430	16,9	425,5	430	193,0
04700/425	16,7	423,3	425	192,0
04700/420	16,5	421,1	420	191,0
04700/415	16,3	418,9	415	190,0
04700/410	16,1	416,7	410	189,0
04700/405	15,9	414,5	405	188,0
04700/400	15,7	412,3	400	187,0
04700/395	15,5	410,1	395	186,0
04700/390	15,3	407,9	390	185,0
04700/385	15,1	405,7	385	184,0
04700/380	14,9	403,5	380	183,0
04700/375	14,7	401,3	375	182,0
04700/370	14,5	399,1	370	181,0
04700/365	14,3	396,9	365	180,0
04700/360	14,1	394,7	360	179,0
04700/355	13,9	392,5	355	178,0
04700/350	13,7	390,3	350	177,0
04700/345	13,5	388,1	345	176,0
04700/340	13,3	385,9	340	175,0
04700/335	13,1	383,7	335	174,0
04700/330	12,9	381,5	330	173,0
04700/325	12,7	379,3	325	172,0
04700/320	12,5	377,1	320	171,0
04700/315	12,3	374,9	315	170,0
04700/310	12,1	372,7	310	169,0
04700/305	11,9	370,5	305	168,0
04700/300	11,7	368,3	300	167,0
04700/295	11,5	366,1	295	166,0
04700/290	11,3	363,9	290	165,0
04700/285	11,1	361,7	285	164,0
04700/280	10,9	359,5	280	163,0
04700/275	10,7	357,3	275	162,0
04700/270	10,5	355,1	270	161,0
04700/265	10,3	352,9	265	160,0
04700/260	10,1	350,7	260	159,0

Article	H/h, inch	Weight lb	H/h, mm	Weight kg
04700/610-605	24,0/23,8	503,8	610/605	228,5
04700/605-600	23,8/23,6	501,6	605/600	227,5
04700/600-595	23,6/23,4	499,3	600/595	226,5
04700/595-590	23,4/23,2	497,1	595/590	225,5
04700/590-585	23,2/23,0	494,9	590/585	224,5
04700/585-580	23,0/22,8	492,7	585/580	223,5
04700/580-575	22,8/22,6	490,5	580/575	222,5
04700/575-570	22,6/22,4	488,3	575/570	221,5
04700/570-565	22,4/22,2	486,1	570/565	220,5
04700/565-560	22,2/22,0	483,9	565/560	219,5
04700/560-555	22,0/21,9	481,7	560/555	218,5
04700/555-550	21,9/21,7	479,5	555/550	217,5
04700/550-545	21,7/21,5	477,3	550/545	216,5
04700/545-540	21,5/21,3	475,1	545/540	215,5
04700/540-535	21,3/21,1	472,9	540/535	214,5
04700/535-530	21,1/20,9	470,7	535/530	213,5
04700/530-525	20,9/20,7	468,5	530/525	212,5
04700/525-520	20,7/20,5	466,3	525/520	211,5
04700/520-515	20,5/20,3	464,1	520/515	210,5
04700/515-510	20,3/20,1	461,9	515/510	209,5
04700/510-505	20,1/19,9	459,7	510/505	208,5
04700/505-500	19,9/19,7	457,5	505/500	207,5
04700/500-495	19,7/19,5	455,3	500/495	206,5
04700/495-490	19,5/19,3	453,1	495/490	205,5
04700/490-485	19,3/19,1	450,9	490/485	204,5
04700/485-480	19,1/18,9	448,7	485/480	203,5
04700/480-475	18,9/18,7	446,5	480/475	202,5
04700/475-470	18,7/18,5	444,3	475/470	201,5
04700/470-465	18,5/18,3	442,1	470/465	200,5
04700/465-460	18,3/18,1	439,9	465/460	199,5
04700/460-455	18,1/17,9	437,7	460/455	198,5
04700/455-450	17,9/17,7	435,5	455/450	197,5
04700/450-445	17,7/17,5	433,3	450/445	196,5
04700/445-440	17,5/17,3	431,1	445/440	195,5
04700/440-435	17,3/17,1	428,9	440/435	194,5
04700/435-430	17,1/16,9	426,7	435/430	193,5
04700/430-425	16,9/16,7	424,5	430/425	192,5
04700/425-420	16,7/16,5	422,3	425/420	191,5
04700/420-415	16,5/16,3	420,1	420/415	190,5
04700/415-410	16,3/16,1	417,9	415/410	189,5
04700/410-405	16,1/15,9	415,7	410/405	188,5
04700/405-400	15,9/15,7	413,5	405/400	187,5
04700/400-395	15,7/15,5	411,3	400/395	186,5
04700/395-390	15,5/15,3	409,1	395/390	185,5
04700/390-385	15,3/15,1	406,9	390/385	184,5
04700/385-380	15,1/14,9	404,7	385/380	183,5
04700/380-375	14,9/14,7	402,5	380/375	182,5
04700/375-370	14,7/14,5	400,3	375/370	181,5
04700/370-365	14,5/14,3	398,1	370/365	180,5
04700/365-360	14,3/14,1	395,9	365/360	179,5
04700/360-355	14,1/13,9	393,7	360/355	178,5
04700/355-350	13,9/13,7	391,5	355/350	177,5
04700/350-345	13,7/13,5	389,3	350/345	176,5
04700/345-340	13,5/13,3	387,1	345/340	175,5
04700/340-335	13,3/13,1	384,9	340/335	174,5
04700/335-330	13,1/12,9	382,7	335/330	173,5
04700/330-325	12,9/12,7	380,5	330/325	172,5
04700/325-320	12,7/12,5	378,3	325/320	171,5
04700/320-315	12,5/12,3	376,1	320/315	170,5
04700/315-310	12,3/12,1	373,9	315/310	169,5
04700/310-305	12,1/11,9	371,7	310/305	168,5
04700/305-300	11,9/11,7	369,5	305/300	167,5
04700/300-295	11,7/11,5	367,3	300/295	166,5
04700/295-290	11,5/11,3	365,1	295/290	165,5
04700/290-285	11,3/11,1	362,9	290/285	164,5
04700/285-280	11,1/10,9	360,7	285/280	163,5
04700/280-275	10,9/10,7	358,5	280/275	162,5
04700/275-270	10,7/10,5	356,3	275/270	161,5
04700/270-265	10,5/10,3	354,1	270/265	160,5
04700/265-260	10,3/10,1	351,9	265/260	159,5

Article	H/h, inch	Weight lb	H/h, mm	Weight kg
04700/610-600	24,0/23,6	503,8	610/600	228,5
04700/600-590	23,6/23,2	499,3	600/590	226,5
04700/590-580	23,2/22,8	494,9	590/580	224,5
04700/580-570	22,8/22,4	490,5	580/570	222,5
04700/570-560	22,4/22,0	486,1	570/560	220,5
04700/560-550	22,0/21,7	481,7	560/550	218,5
04700/550-540	21,7/21,3	477,3	550/540	216,5
04700/540-530	21,3/20,9	472,9	540/530	214,5
04700/530-520	20,9/20,5	468,5	530/520	212,5
04700/520-510	20,5/20,1	464,1	520/510	210,5
04700/510-500	20,1/19,7	459,7	510/500	208,5
04700/500-490	19,7/19,3	455,3	500/490	206,5
04700/490-480	19,3/18,9	450,9	490/480	204,5
04700/480-470	18,9/18,5	446,5	480/470	202,5
04700/470-460	18,5/18,1	442,1	470/460	200,5
04700/460-450	18,1/17,7	437,7	460/450	198,5
04700/450-440	17,7/17,3	433,3	450/440	196,5
04700/440-430	17,3/16,9	428,9	440/430	194,5
04700/430-420	16,9/16,5	424,5	430/420	192,5
04700/420-410	16,5/16,1	420,1	420/410	190,5
04700/410-400	16,1/15,7	415,7	410/400	188,5
04700/400-390	15,7/15,3	411,3	400/390	186,5
04700/390-380	15,3/14,9	406,9	390/380	184,5
04700/380-370	14,9/14,5	402,5	380/370	182,5
04700/370-360	14,5/14,1	398,1	370/360	180,5
04700/360-350	14,1/13,7	393,7	360/350	178,5
04700/350-340	13,7/13,3	389,3	350/340	176,5
04700/340-330	13,3/12,9	384,9	340/330	174,5
04700/330-320	12,9/12,5	380,5	330/320	172,5
04700/320-310	12,5/12,1	376,1	320/310	170,5
04700/310-300	12,1/11,7	371,7	310/300	168,5
04700/300-290	11,7/11,3	367,3	300/290	166,5
04700/290-280	11,3/10,9	362,9	290/280	164,5
04700/280-270	10,9/10,5	358,5	280/270	162,5
04700/270-260	10,5/10,1	354,1	270/260	160,5

1. Dimensions for reference, inch [mm]
2. Delivery and packaging are carried out in accordance with the terms of the contract
3. The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product
4. Deviation of the actual weight of the nominal can be up to 10%.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION		A-01	
						TITLE:					
						12"[DN300] Concrete Drain Channel Mega H24.0"10.2"[H610-260] with Cast Iron Grate E600					
						ARTICLE:					
						A3					
						SCALE:1:10					
						SHEET 2 OF 2					