


1. Dimensions for reference
2. Delivery and packaging are carried out in accordance with the terms of the contract
3. The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product
4. Deviation of the actual weight of the nominal can be up to 10%.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:		FINISH:	DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	A-01
DRAWN			O. Kozhukh	SIGNATURE	DATE	05.10.2022
CHK'D			V. Kyselytsia			
APPV'D			I. Malynovskiy			
MFG						
Q.A			MATERIAL:		Concrete, Cast Iron	
			WEIGHT: kg		SCALE: 1:10	
				TITLE:		Concrete Drain Channel Mega DN500 H610-460 with Cast Iron Grate E600
				ARTICLE:		A3
				SHEET 1 OF 2		

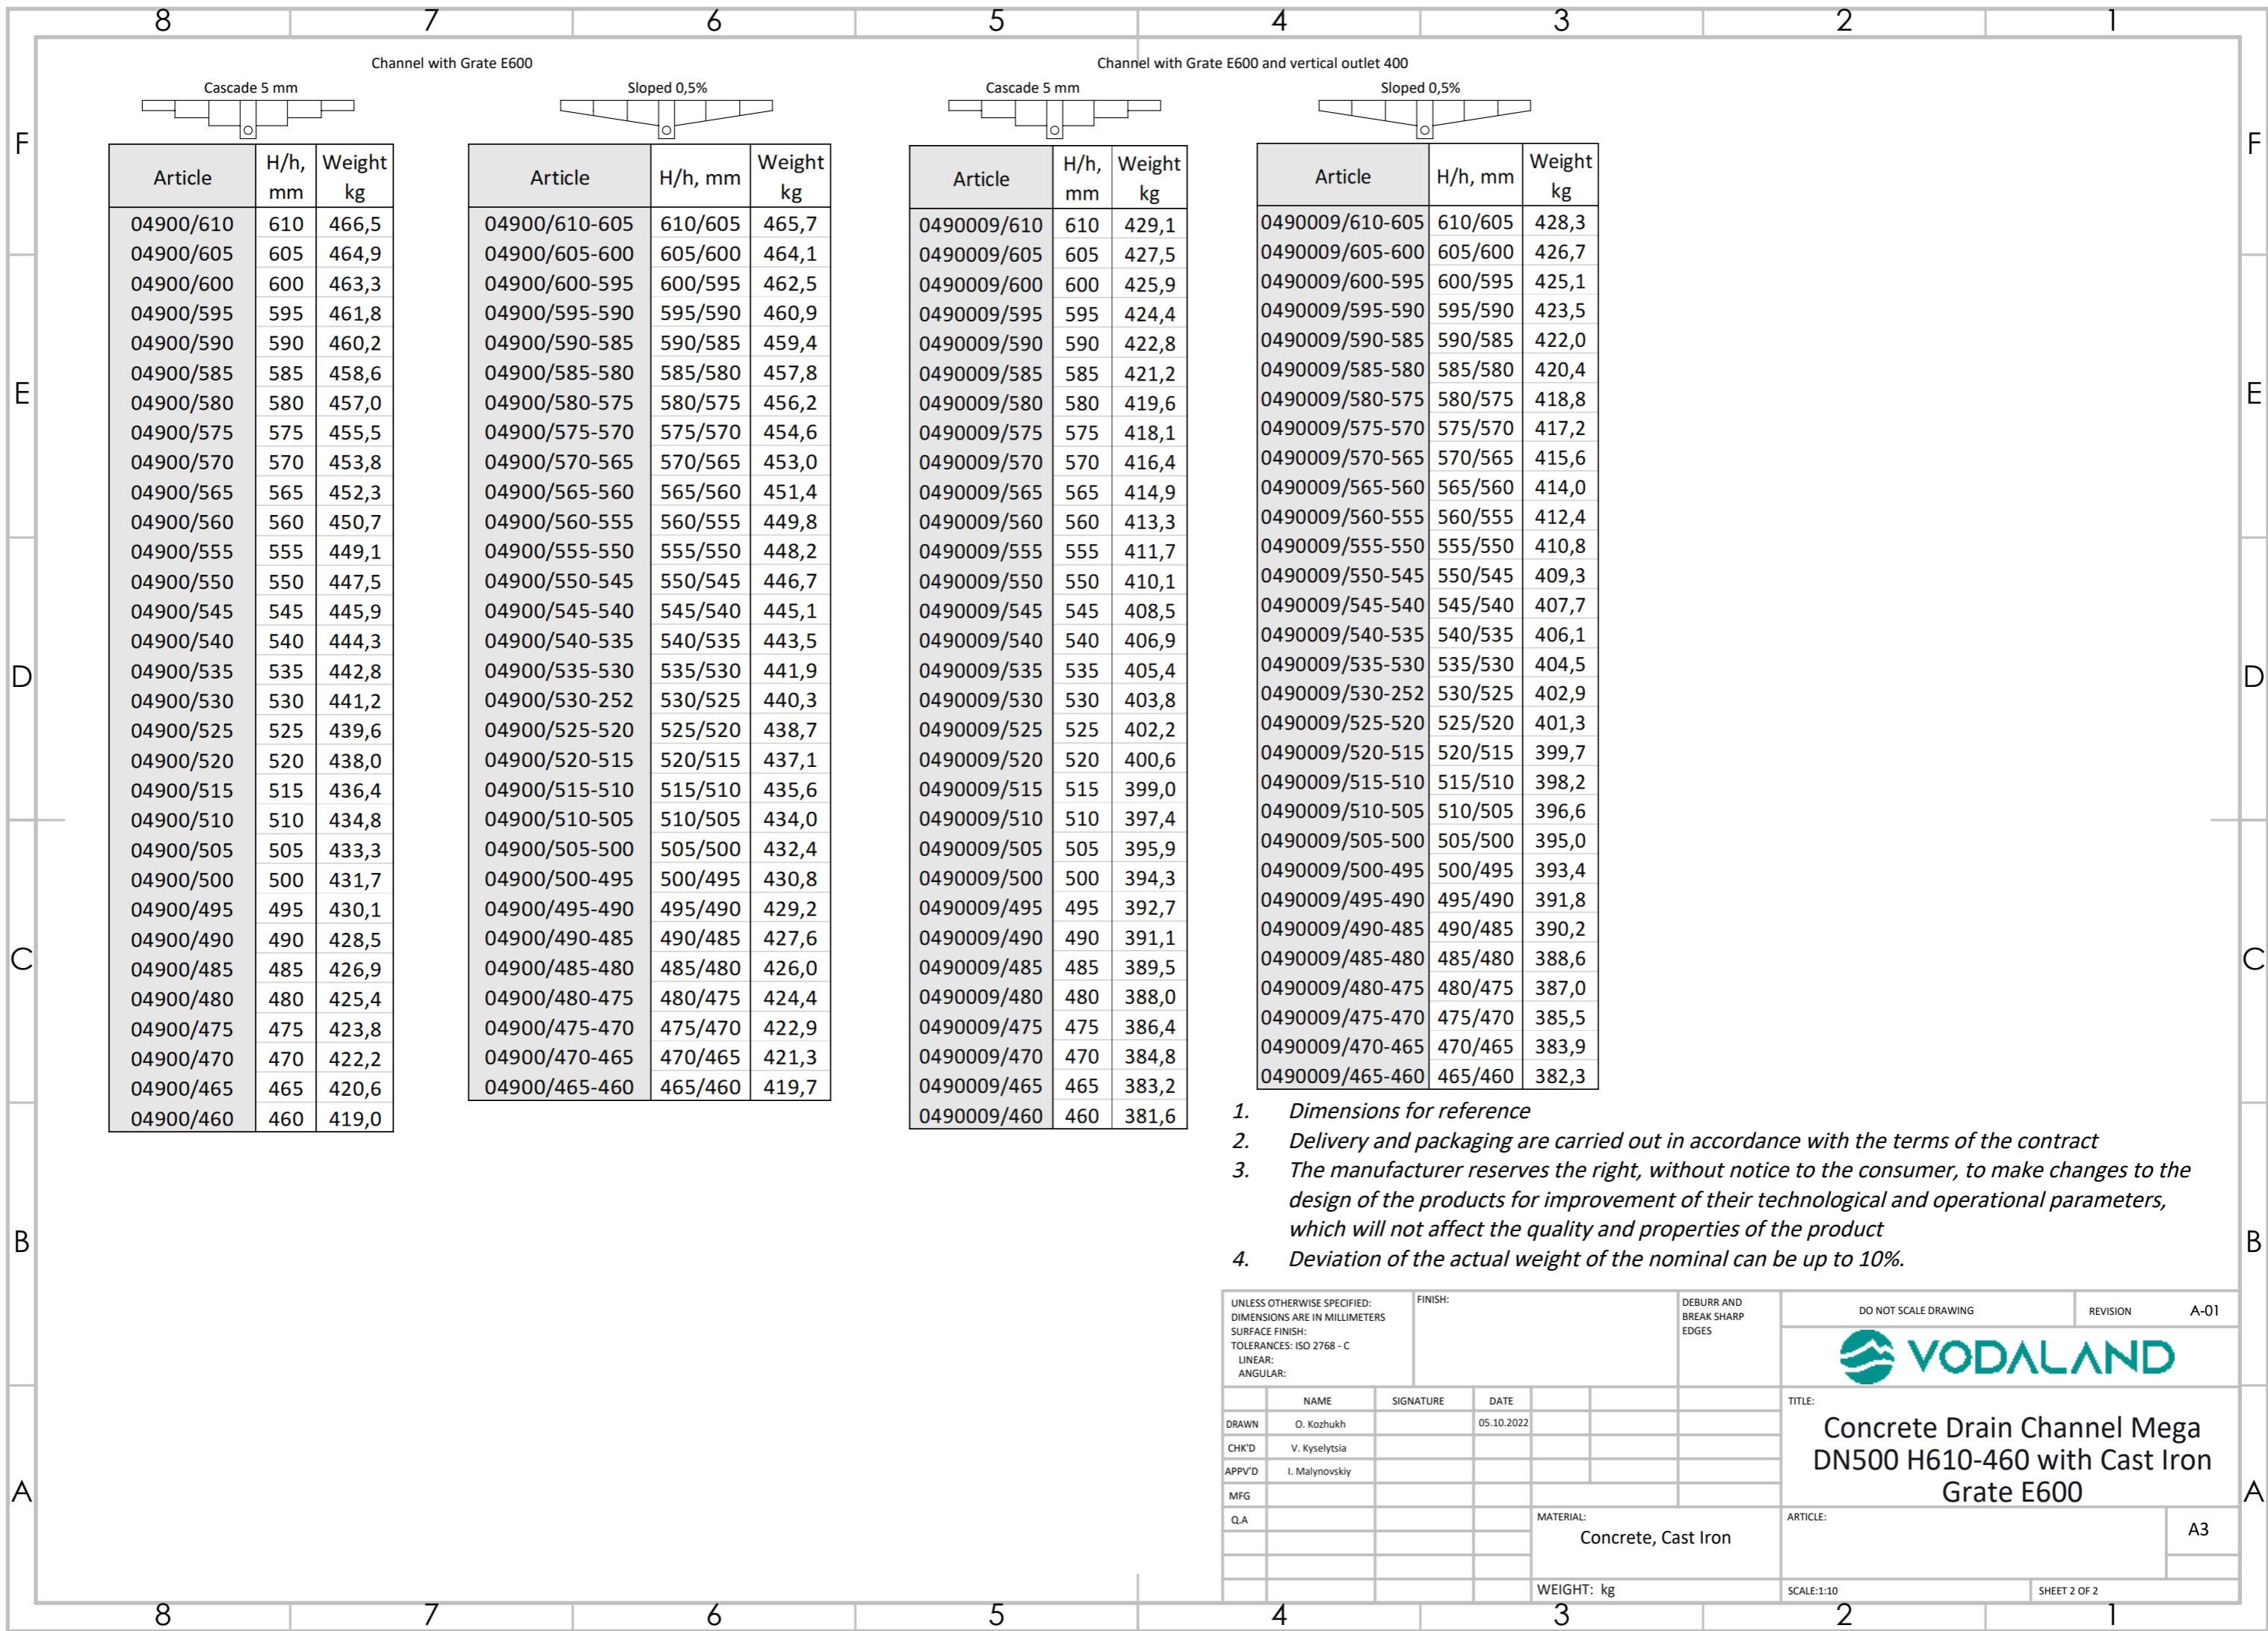

Channel with Grate E600

Cascade 5 mm

Article	H/h, mm	Weight kg
04900/610	610	466,5
04900/605	605	464,9
04900/600	600	463,3
04900/595	595	461,8
04900/590	590	460,2
04900/585	585	458,6
04900/580	580	457,0
04900/575	575	455,5
04900/570	570	453,8
04900/565	565	452,3
04900/560	560	450,7
04900/555	555	449,1
04900/550	550	447,5
04900/545	545	445,9
04900/540	540	444,3
04900/535	535	442,8
04900/530	530	441,2
04900/525	525	439,6
04900/520	520	438,0
04900/515	515	436,4
04900/510	510	434,8
04900/505	505	433,3
04900/500	500	431,7
04900/495	495	430,1
04900/490	490	428,5
04900/485	485	426,9
04900/480	480	425,4
04900/475	475	423,8
04900/470	470	422,2
04900/465	465	420,6
04900/460	460	419,0

Channel with Grate E600 and vertical outlet 400

Sloped 0,5%

Article	H/h, mm	Weight kg
04900/610-605	610/605	465,7
04900/605-600	605/600	464,1
04900/600-595	600/595	462,5
04900/595-590	595/590	460,9
04900/590-585	590/585	459,4
04900/585-580	585/580	457,8
04900/580-575	580/575	456,2
04900/575-570	575/570	454,6
04900/570-565	570/565	453,0
04900/565-560	565/560	451,4
04900/560-555	560/555	449,8
04900/555-550	555/550	448,2
04900/550-545	550/545	446,7
04900/545-540	545/540	445,1
04900/540-535	540/535	443,5
04900/535-530	535/530	441,9
04900/530-252	530/525	440,3
04900/525-520	525/520	438,7
04900/520-515	520/515	437,1
04900/515-510	515/510	435,6
04900/510-505	510/505	434,0
04900/505-500	505/500	432,4
04900/500-495	500/495	430,8
04900/495-490	495/490	429,2
04900/490-485	490/485	427,6
04900/485-480	485/480	426,0
04900/480-475	480/475	424,4
04900/475-470	475/470	422,9
04900/470-465	470/465	421,3
04900/465-460	465/460	419,7

Channel with Grate E600 and vertical outlet 400

Cascade 5 mm


Article	H/h, mm	Weight kg
0490009/610	610	429,1
0490009/605	605	427,5
0490009/600	600	425,9
0490009/595	595	424,4
0490009/590	590	422,8
0490009/585	585	421,2
0490009/580	580	419,6
0490009/575	575	418,1
0490009/570	570	416,4
0490009/565	565	414,9
0490009/560	560	413,3
0490009/555	555	411,7
0490009/550	550	410,1
0490009/545	545	408,5
0490009/540	540	406,9
0490009/535	535	405,4
0490009/530	530	403,8
0490009/525	525	402,2
0490009/520	520	400,6
0490009/515	515	399,0
0490009/510	510	397,4
0490009/505	505	395,9
0490009/500	500	394,3
0490009/495	495	392,7
0490009/490	490	391,1
0490009/485	485	389,5
0490009/480	480	388,0
0490009/475	475	386,4
0490009/470	470	384,8
0490009/465	465	383,2
0490009/460	460	381,6

Channel with Grate E600 and vertical outlet 400

Sloped 0,5%

Article	H/h, mm	Weight kg
0490009/610-605	610/605	428,3
0490009/605-600	605/600	426,7
0490009/600-595	600/595	425,1
0490009/595-590	595/590	423,5
0490009/590-585	590/585	422,0
0490009/585-580	585/580	420,4
0490009/580-575	580/575	418,8
0490009/575-570	575/570	417,2
0490009/570-565	570/565	415,6
0490009/565-560	565/560	414,0
0490009/560-555	560/555	412,4
0490009/555-550	555/550	410,8
0490009/550-545	550/545	409,3
0490009/545-540	545/540	407,7
0490009/540-535	540/535	406,1
0490009/535-530	535/530	404,5
0490009/530-252	530/525	402,9
0490009/525-520	525/520	401,3
0490009/520-515	520/515	399,7
0490009/515-510	515/510	398,2
0490009/510-505	510/505	396,6
0490009/505-500	505/500	395,0
0490009/500-495	500/495	393,4
0490009/495-490	495/490	391,8
0490009/490-485	490/485	390,2
0490009/485-480	485/480	388,6
0490009/480-475	480/475	387,0
0490009/475-470	475/470	385,5
0490009/470-465	470/465	383,9
0490009/465-460	465/460	382,3

1. Dimensions for reference
2. Delivery and packaging are carried out in accordance with the terms of the contract
3. The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product
4. Deviation of the actual weight of the nominal can be up to 10%.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION		A-01	
DRAWN		O. Kozhukh		DATE		05.10.2022		 <p>TITLE: Concrete Drain Channel Mega DN500 H610-460 with Cast Iron Grate E600</p>			
CHK'D		V. Kyselytsia		MFG							
APPV'D		I. Malynovskiy		Q.A							
MATERIAL:		Concrete, Cast Iron		ARTICLE:		A3					
WEIGHT: kg				SCALE:1:10		SHEET 2 OF 2					