

		8				7				6	>				5			
		Channel with Grate F900						Channel with Grate F900 and vertical outlet 250										
		Cascade 5 mm				Slope	Sloped 0,5%			Cascade 5 mm				Sloped 0,5%				
									C]					
F																		
· ·		Article	H/h,	Weight		Article	H/h, mm	Weight kg		Article	H/h, mm	Weight kg		Article	H/h, mm	Weight kg		
		04701/610	mm 610	kg 236,0		04701/610-605	610/605	235,5		0470109/610	610	225,5	0	470109/610-605	610/605	225,0		
		04701/605	605	235,0		04701/605-600	605/600	234,5		0470109/605	605	224,5		470109/605-600		224,0		
		04701/600 04701/595	600 595	234,0 233,0		04701/600-595 04701/595-590	600/595 595/590	233,5 232,5		0470109/600 0470109/595	600 595	223,5 222,5		470109/600-595 470109/595-590		223,0 222,0		
E		04701/590	590	232,0		04701/590-585	590/585	231,5		0470109/590	590	221,5		470109/590-585		221,0		
		04701/585	585	231,0		04701/585-580 04701/580-575	585/580 580/575	230,5 229,5		0470109/585	585	220,5		470109/585-580 470109/580-575		220,0 219,0		
		04701/580 04701/575	580 575	230,0 229,0		04701/575-570	575/570	228,5		0470109/580 0470109/575	580 575	219,5 218,5		470109/575-570		213,0		
		04701/570	570	228,0		04701/570-565	570/565	227,5		0470109/570	570	217,5		470109/570-565		217,0		
		04701/565 04701/560	565 560	227,0 226,0		04701/565-560 04701/560-555	565/560 560/555	226,5 225,5		0470109/565 0470109/560	565 560	216,5 215,5		470109/565-560 470109/560-555		216,0 215,0		
15		04701/555	555	225,0		04701/555-550	555/550	224,5		0470109/555	555	214,5		470109/555-550		214,0		
		04701/550	550	224,0		04701/550-545	550/545	223,5		0470109/550	550	213,5		470109/550-545		213,0		
		04701/545 04701/540	545 540	223,0 222,0		04701/545-540 04701/540-535	545/540 540/535	222,5 221,5		0470109/545 0470109/540	545 540	212,5		470109/545-540 470109/540-535		212,0 211,0		
		04701/535	535	221,0		04701/535-530		220,5		0470109/535	535	210,5	0	470109/535-530	535/530	210,0		
		04701/530	530	220,0		04701/530-252	530/525 525/520	219,5		0470109/530	530	209,5		470109/530-252		209,0		
	1	04701/525 04701/520	525 520	219,0 218,0		04701/525-520 04701/520-515	525/520	218,5 217,5		0470109/525 0470109/520	525 520	208,5 207,5		470109/525-520 470109/520-515		208,0 207,0		
		04701/515	515	210,0		04701/515-510	515/510	216,5		0470109/515	515	206,5		470109/515-510		206,0		
		04701/510 04701/505	510 505	216,0 215,0		04701/510-505 04701/505-500	510/505 505/500	215,5 214,5		0470109/510 0470109/505	510 505	205,5 204,5		470109/510-505 470109/505-500		205,0 204,0		
		04701/505	500	213,0		04701/500-495	500/495	213,5		0470109/500	500	203,5		470109/500-495		203,0		
		04701/495	495	213,0		04701/495-490	495/490	212,5		0470109/495	495	202,5		470109/495-490		202,0		
D		04701/490 04701/485	490 485	212,0 211,0		04701/490-485 04701/485-480	490/485 485/480	211,5 210,5		0470109/490 0470109/485	490 485	201,5		470109/490-485 470109/485-480		201,0 200,0		
		04701/480	480	210,0		04701/480-475	480/475	209,5		0470109/480	480	199,5		470109/480-475		199,0		
		04701/475	475	209,0		04701/475-470 04701/470-465	475/470 470/465	208,5 207,5		0470109/475 0470109/470	475	198,5 197,5		470109/475-470 470109/470-465		198,0 197,0		
		04701/470 04701/465	470	208,0 207,0		04701/465-460	465/460	206,5		0470109/4/0	4/0	197,5		470109/465-460		196,0		
		04701/460	460	206,0		04701/460-455	460/455	205,5		0470109/460	460	195,5		470109/460-455		195,0		
	-	04701/455 04701/450	455	205,0 204,0		04701/455-450 04701/450-445	455/450	204,5 203,5		0470109/455 0470109/450	455	194,5 193,5		470109/455-450 470109/450-445		194,0 193,0		
		04701/450	445	204,0		04701/445-440	445/440	202,5		0470109/445	445	192,5		470109/445-440		192,0		
		04701/440	440	202,0		04701/440-435 04701/435-430	440/435 435/430	201,5 200,5		0470109/440 0470109/435	440 435	191,5		470109/440-435 470109/435-430		191,0 190,0		
		04701/435 04701/430	435 430	201,0 200,0		04701/430-425	430/425			0470109/430	435	190,5 189,5		470109/430-425		189,0		
		04701/425	425	199,0		04701/425-420				0470109/425	425	188,5		470109/425-420		188,0		
С		04701/420 04701/415	420	198,0 197,0		04701/420-415 04701/415-410	420/415	197,5 196,5		0470109/420 0470109/415	420	187,5 186,5		470109/420-415 470109/415-410	-	187,0 186,0		
-		04701/413	413	197,8		04701/410-405	410/405	197,3		0470109/410	410	187,3	0	470109/410-405	410/405	186,8		
		04701/405	405	196,7		04701/405-400 04701/400-395	405/400 400/395	196,2 195,1		0470109/405	405	186,2		470109/405-400 470109/400-395		185,7 184,6		
		04701/400 04701/395	400	195,6 194,5		04701/395-390	395/390	195,1		0470109/400 0470109/395	400 395	185,1 184,0		470109/395-390	-	184,0		
		04701/390	390	193,4		04701/390-385				0470109/390	390	182,9		470109/390-385		182,4		
		04701/385	385	192,3		04701/385-380 04701/380-375	385/380 380/375	191,8 190,7		0470109/385 0470109/380	385 380	181,8 180,7		470109/385-380 470109/380-375		181,3 180,2		
		04701/380 04701/375	380 375	191,2 190,1		04701/375-370	375/370	189,6		0470109/375	375	179,6	0	470109/375-370	375/370	179,1		
		04701/370	370	189,0		04701/370-365 04701/365-360	370/365 365/360	188,5 187,4		0470109/370	370	178,5		470109/370-365 470109/365-360		178,0 176,9		
		04701/365 04701/360	365	187,9 186,8		04701/365-360	360/355	187,4		0470109/365 0470109/360	365 360	177,4 176,3		470109/360-355		175,8		
		04701/355	355	185,7		04701/355-350	355/350	185,2		0470109/355	355	175,2		470109/355-350		174,7		
В		04701/350 04701/345	350 345	184,6		04701/350-345 04701/345-340	350/345 345/340			0470109/350 0470109/345	350 345	174,1 173,0		470109/350-345 470109/345-340		173,6 172,5		
		04701/345	340	183,5 182,4		04701/340-335	-			0470109/340	340	171,9	0	470109/340-335	340/335	171,4		
		04701/335	335	181,3		04701/335-330 04701/330-325	335/330 330/325			0470109/335	335	170,8		470109/335-330 470109/330-325		170,3 169,2		
		04701/330 04701/325	330 325	180,2 179,1		04701/325-320	325/320	179,7		0470109/330 0470109/325	330 325	169,7 168,6		470109/325-320		168,1		
		04701/320	320	178,0		04701/320-315				0470109/320	320	167,5		470109/320-315		167,0		
		04701/315	315	176,9		04701/315-310 04701/310-305	315/310 310/305	176,4 175,3		0470109/315 0470109/310	315 310	166,4 165,3		470109/315-310 470109/310-305	-	165,9 164,8		
A	1	04701/310 04701/305	310 305	175,8 174,7		04701/305-300				0470109/310	305	164,2	0	470109/305-300	305/300	163,7		
		04701/300	300	173,6		04701/300-295	300/295	173,1		0470109/300	300	163,1		470109/300-295 470109/295-290		162,6		
		04701/295 04701/290	295 290	172,5 171,4		04701/295-290 04701/290-285	295/290 290/285	172,0 170,9		0470109/295 0470109/290	295 290	162,0 160,9		470109/295-290		161,5 160,4		
		04701/290	290	171,4		04701/285-280	285/280	169,8		0470109/285	285	159,8	0	470109/285-280	285/280	159,3		
		04701/280	280	169,2		04701/280-275 04701/275-270	280/275 275/270	168,7 167,6		0470109/280 0470109/275	280	158,7		470109/280-275 470109/275-270		158,2 157,1		
		04701/275 04701/270	275	168,1 167,0		04701/270-265	270/265			0470109/275	275 270	157,6 156,5	0	470109/270-265	270/265	156,0		
		04701/265	265	165,9		04701/265-260	265/260	165,4		0470109/265	265	155,4	0	470109/265-260	265/260	154,9		
		04701/260	260	164,8]					0470109/260	260	154,3						
		8				7				6)				5			

- Dimensions for reference 1.
- 2.


3

Δ

2

- which will not affect the quality and properties of the product
- 4. Deviation of the actual weight of the nominal can be up to 10%.

DIMENS			FINISH:				DEBURR BREAK SH EDGES			
	NAME	SIGN	IATURE	DATE						
DRAWN	O. Kozhukh			04.10.2022						
CHK'D	V. Kyselytsia									
APPV'D	I. Malynovskiy									
MFG										
Q.A					MATERIAL:					
					C	Concrete, Ca	ast Iro			
	WEIGHT: k						kg			
	4				3					

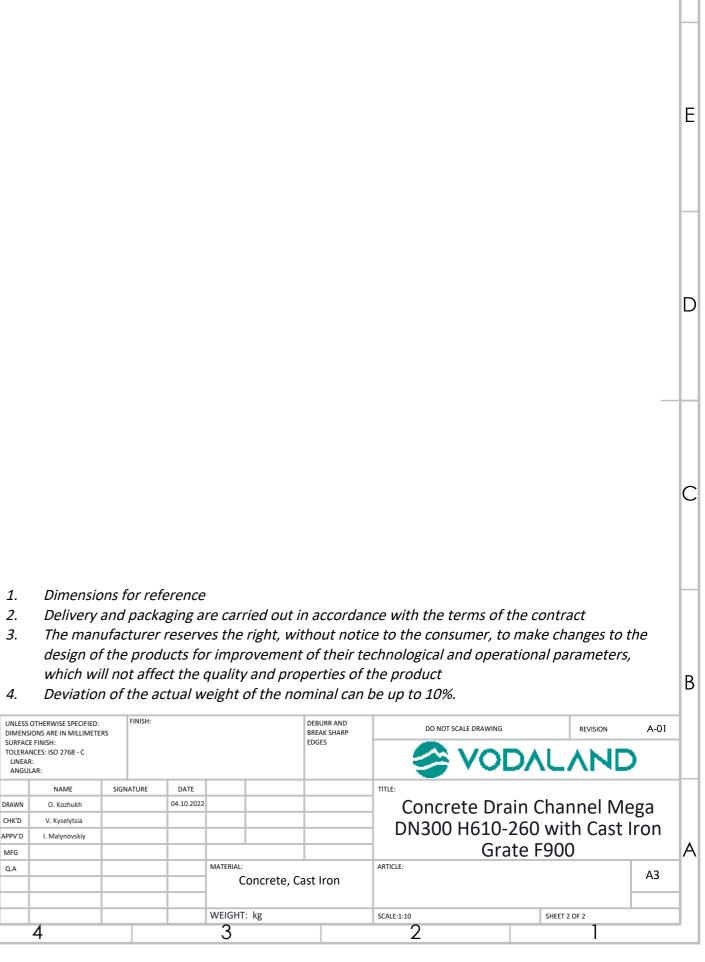

F